


Pneumatic Operated PET Strapping Tool

Pneumatic tool is applicable to neutral packaging and widely used in the export enterprises of Iron, Color metal, textile, household electric appliance, foodstuff and daily merchandise. It adopts PET tape to finish a strap in a high speed once. This PET tape is high-tension, environmental -protection and no-pollution and can be used to replace Steel Strap.

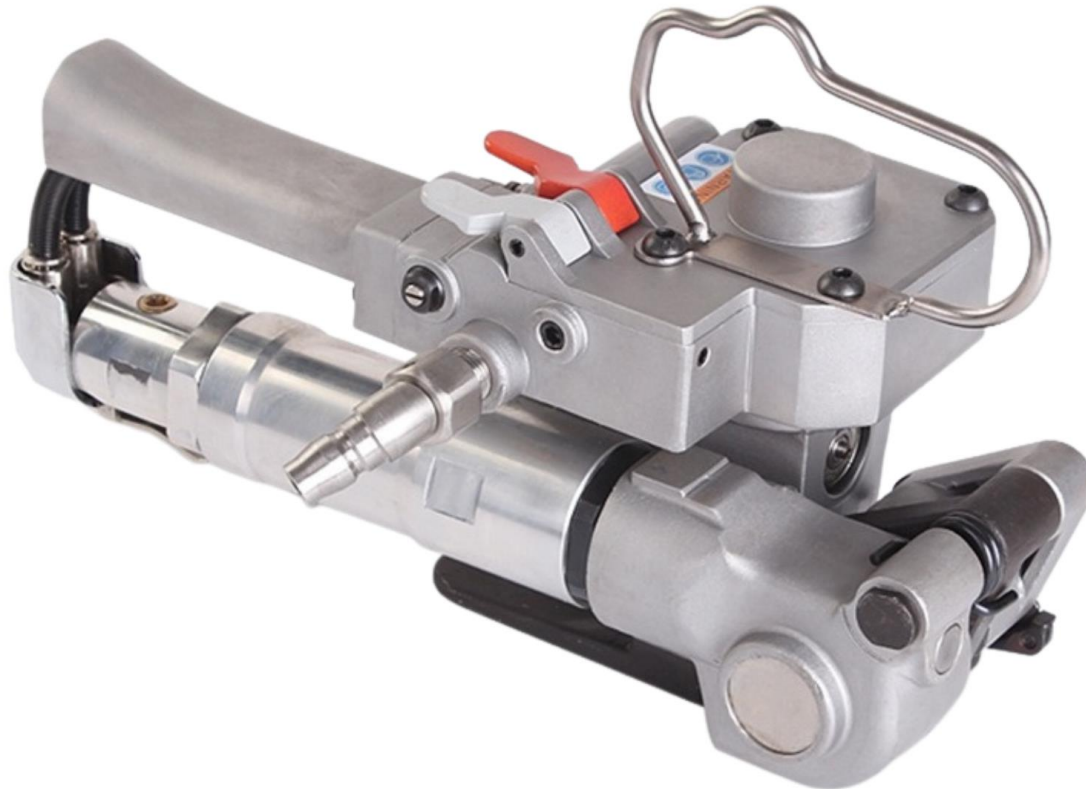

Specifications:

Model	AQD-25
Max strap tension	Max. 3500 N
Air pressure	0.5 - 0.6 Mpa
Tool weight	3.8 kg
Overall Length	275 mm
Tool width	115 mm
Tool height	130 mm
Strap material	Polyester (PET)
Strap width	19 – 25 mm
Strap thickness	Heavy gauge 0.7 - 1.27 mm

www.dipack.in

Regd Address : A-34, Ashok Nagar, Street No 4, Mandoli Road, Shahdara, Delhi 110093
Head Office : B-65, Ground Floor, Street No 5, East Nathu Colony, Shahdara, Delhi 110093

Email : sales@dipackcorporation.in

Ph: 9953471435, 9540471435, 9911671435